

# Steatite Square & Slim

Square and slim design water heater equipped with aggressive or hard water resistant Steatite technology



## COMFORT

- **Easy to maintain: Steatite heating element removable without draining the tank**
- New Atlantic design
- Control knob on the front of the tank

## SAVINGS

- High-precision bulb thermostat with integrated security
- High-efficiency water inlet
- CFC-free high-density insulation for more energy savings

## QUALITY - DURABILITY

- **Robust: suitable for all types of water thanks to dry ceramic heating element**
- Steatite technology: Ceramic dry heating element - unique patented technology, adapted to highly mineralized, hard or desalinated water
- Magnesium anode for increased protection of the tank
- New generation diamond-quality enamelling
- Pressure relief valve
- Dielectric union
- Specific lip gasket flange seal to prevent rust around flange

## USER-FRIENDLINESS

- **Square-shaped water heater with slim version to fit all interiors and confined spaces**
- Slim version adapted to confined spaces
- IP 25 - Full compliance with European standards for electrical safety and user's protection
- Dual power selection: 1200W in comfort mode or 2400W in boost mode (only for Steatite square model)
- Pilot light
- Plug (only for Steatite square model)



Steatite square

Steatite square Slim



EASY TO INSTALL		
 <p>Model available*</p>	<p><b>ELECTRIC WATER HEATER</b>  <b>75 TO 150 L</b>            (VERTICAL WALL MOUNTED)  <b>30 TO 50 L</b>            (SLIM VERTICAL WALL MOUNTED)            Capacity</p>	 <p>Energy saving</p>
 <p>Front control panel</p>	<p><b>MAGNESIUM ANODE</b>            Tank protection</p>	<p><b>STEATITE</b>  <i>technology</i>            Heating element type</p>

\* Model types : A : Vertical wall mounted / B : Horizontal wall mounted / C : Vertical Floor standing



Steatite square

Steatite square Slim



Control panel

- 1 Dual-power selection (only for Steatite model)
- 2 Pilot light
- 3 Temperature control


## STEATITE technology

Ceramic dry heating element + enamelled steel sleeve. Steatite technology: state-of-the-art the ultimate technology for the best long-lasting service



- 1 Magnesium anode: ultimate protection against corrosion
- 2 High-density polyurethane foam 0% CFC
- 3 Diamond-quality enamel
- 4 Enamelled sleeve
- 5 Optimised stainless steel outlet pipe
- 6 Inlet diffuser
- 7 Steatite dry heating element
- 8 Temperature knob (only for Steatite square)
- 9 Dual power knob (only for Steatite square)

## INSTALLATION DIMENSIONS (in mm)

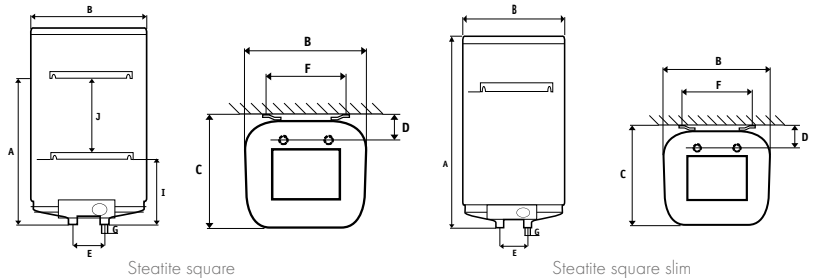

Steatite square

Steatite square slim

## STÉATITE SQUARE Vertical wall mounted

### TECHNICAL DATA

CAPACITY (L)	OUTPUT (W)	VOLTAGE (V)	HEAT-UP TIME AT 60°C ( $\Delta t=20^{\circ}\text{C}$ )	HEAT-UP TIME AT 60°C ( $\Delta t=50^{\circ}\text{C}$ )	ENERGY CONSUMPTION (KWH/24H AT 65°C)
75	1200	230 (220/240)	1h23	3h27	0.91
	2400	230 (220/240)	0h42	1h44	0.91
100	1200	230 (220/240)	2h02	5h06	1.07
	2400	230 (220/240)	1h02	2h34	1.07
150	1200	230 (220/240)	3h08	7h50	1.57
	2400	230 (220/240)	1h30	3h44	1.57

### DIMENSIONS

CAPACITY (L)	DIMENSIONS (mm)								FLANGE OPENING ( $\varnothing$ ) mm	NET WEIGHT (kg)	ERP ENERGY CLASS
	A	B	C	D	E	F	G	I			
75	706	490	510	175	230	350/440	3/4"	350	72	27	B
100	875	490	510	175	230	350/440	3/4"	500	72	30	C
150	1198	490	510	175	230	350/440	3/4"	800	72	40	C

CE ENE IP 25

## STÉATITE SQUARE SLIM Vertical wall mounted

### TECHNICAL DATA

CAPACITY (L)	OUTPUT (W)	VOLTAGE (V)	HEAT-UP TIME AT 60°C ( $\Delta t=20^{\circ}\text{C}$ )	HEAT-UP TIME AT 60°C ( $\Delta t=50^{\circ}\text{C}$ )	ENERGY CONSUMPTION (KWH/24H AT 65°C)
30	1500	230 (220/240)	0h30	1h18	0.56
50	2100	230 (220/240)	0h37	1h32	0.76

### DIMENSIONS

CAPACITY (L)	DIMENSIONS (mm)							FLANGE OPENING ( $\varnothing$ ) mm	NET WEIGHT (kg)	ERP ENERGY CLASS
	A	B	C	D	E	F	G			
30	624	432	347	100	100	184	1/2"	72	13	C
50	950	432	347	100	100	184	1/2"	72	18	D

CE ENE IP 25